

HX Series


Seafood Chiller





SAUVERAIN

HX SERIES SEAFOOD CHILLER





HX SERIES

SEAFOOD CHILLER



1. PRODUCT DESCRIPTION

The HX series of seafood chiller developed by our factory, which designed into an overall compact structure with a beautiful and exquisite structure. It's including the condenser, titanium gun evaporator, various valves and control systems. Which can be directly used in fields such as seafood farming.



The product can be wall-mounted or vertical, and the unit is installed on the ground and the side of the wall.



The product can adjust the temperature of cold and warm water, and the water temperature can be adjusted between 5 and 40 degrees.



The product is fully automated and intelligently controlled, with control functions such as water temperature setting and control, constant temperature setting and system operation protection.



2. MODEL DESCRIPTION

HX 150 S

VOLTAGE

S: 1P / 220V / 50Hz
T: 3P / 380V / 50Hz

NOMINAL POWER
(HP × 100)

PRODUCT SERIES
Series Seafood Chiller

**SAUVERAIN****SAUVERAIN**

HX SERIES


SEAFOOD CHILLER

3. PERFORMANCE DATA SHEET

Model	HX150S	HX200S	HX300S	HX300T	HX500T
Power Supply	1P / 220V / 50Hz	1P / 220V / 50Hz	1P / 220V / 50Hz	3P / 380V / 50Hz	3P / 380V / 50Hz
Apply water temp. (°C)	5 ~ 26°C	5 ~ 26°C	5 ~ 26°C	5 ~ 26°C	5 ~ 26°C
Apply water volume (m ³)	0.75 - 2.3	1.0 - 3.0	1.5 - 4.5	1.5 - 4.5	2.5 - 7.5
Input Power (kW)	1.3	1.7	2.4	2.4	4.4
Nominal capacity (kW)	3.9	5.4	7.2	7.2	14.4
Refrigerant	R22	R22	R22	R22	R22
Overall size - L (mm)	650	726	726	726	980
Overall size - W (mm)	490	490	490	490	530
Overall size - H (mm)	600	600	600	600	1250
Install size (A×B) (mm)	373 × 460	483 × 460	483 × 460	483 × 460	673 × 480
Water inlet / outlet size	DN50	DN50	DN50	DN50	DN50
Weight (kg)	45	60	60	60	125

Remark: The calibration conditions of cooling capacity are condensation temp. 42°C, evaporation temp. 0°C, inlet temp. 12°C and outlet 7°C for water.

4. OUTLINE & INSTALLATION DIMENSION

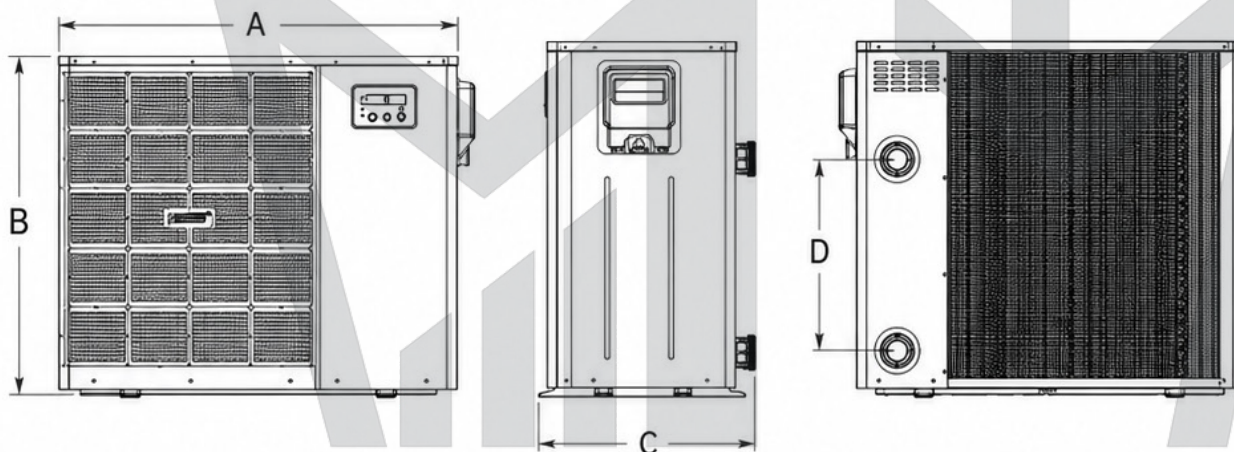

A: Length

B: Height

C: Width

D: Center Distance