

PU Series

**Vertical Box-Type
Condensing Unit**





SAUVERAIN



PU

PU Series

Vertical Box-Type Condensing Unit





PU SERIES VERTICAL BOX-TYPE CONDENSING UNIT




1. PRODUCT DESCRIPTION

PU series vertical box-type condensation units have the following characteristics:

- 1 The product adopts vertical box-type structure, fan side installation, effectively prevent dust, rain water and so on into the cabinet;
- 2 High air duct design, low noise, beautiful appearance;
- 3 The cover of the case adopts hinge structure, which is easy to maintain and operate;
- 4 Compressor uses Emerson ZB and ZFI series scroll compressor or Bitzer semi-hermetic compressor to meet the application of medium temperature and low temperature;
- 5 Adopt U-type condenser, it has large windward side, small wind resistance and good heat transfer effect;
- 6 It can meet the requirements of R22, R404A, R507A, R448A, R449A and other refrigerants.

2. MODEL DESCRIPTION

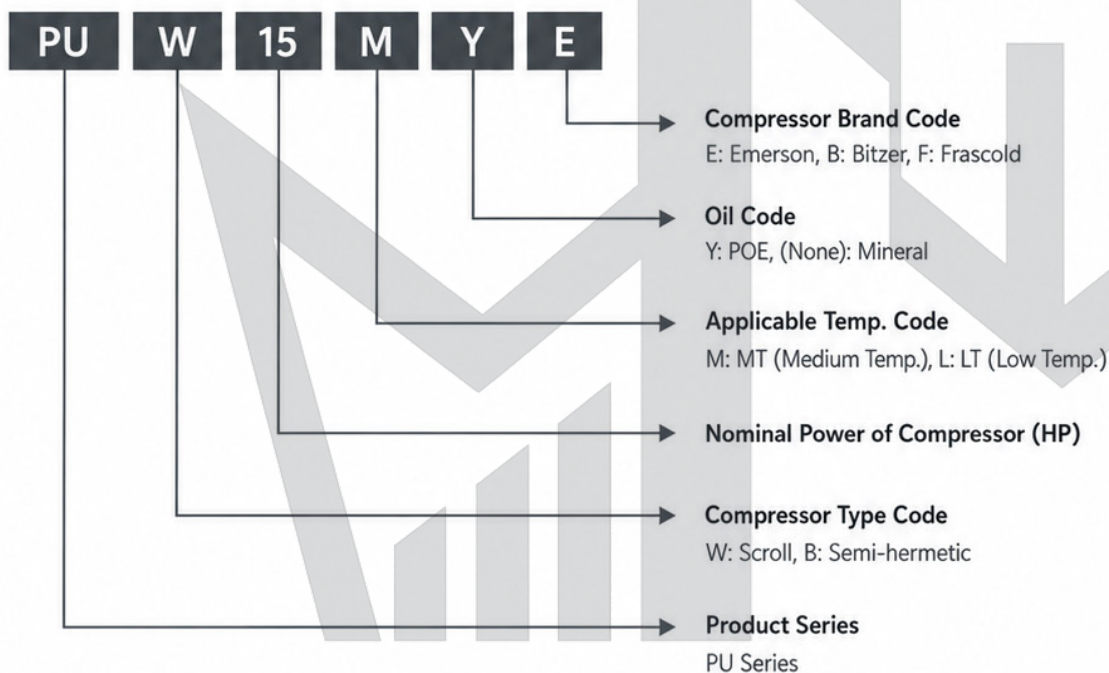



3. TECHNICAL DATA



3.1 Unit with Emerson scroll compressor

3.1.1 Medium temperature unit R404A / R507A

Model			PUW05MYE	PUW06MYE	PUW08MYE	PUW10MYE	PUW13MYE
Power Supply			3P / 380V / 50Hz				
Apply Temp.			-5°C ~ 5°C				
Comp.	Model		ZB38KQE	ZB45KQE	ZB58KQE	ZB76KQE	ZB95KQE
	Max. I (A)		13.5	16.1	23.0	26.9	31.0
Capacity / Power (kW)	Evap.	-5°C	9.8 / 4.4	11.1 / 5.0	14.7 / 6.6	19.6 / 8.6	24.0 / 11.2
		-8°C	8.7 / 4.2	10.2 / 4.8	13.6 / 6.3	18.1 / 8.3	22.1 / 10.7
		-10°C	8.2 / 4.1	9.6 / 4.6	12.7 / 6.2	17.0 / 8.1	20.8 / 10.4
		-15°C	6.9 / 3.9	8.1 / 4.4	10.6 / 5.9	14.2 / 7.6	17.4 / 9.9
Fan	Voltage (V)		3P / 380V / 50Hz				
	Current (A)		0.92	0.92	0.92	1.75	2.2
	Power (W)		220×2	220×2	220×2	937×1	548×2
	Rev. (r/min)		1362	1362	1362	1378	1380
Suction Line (mm)			φ22	φ22	φ28	φ35	φ35
Liquid Line (mm)			φ12	φ12	φ16	φ16	φ16
Size	L (mm)		1470	1470	1470	1620	1620
	W (mm)		825	825	825	1010	1010
	H (mm)		1465	1465	1465	1695	1695

Note: Parameter calibration condition, ambient temperature 32°C;

Model		PUW15MYE	PUW20MYE	PUW22MYE	PUW25MYE	
Power Supply		3P / 380V / 50Hz				
Apply Temp.		-5°C ~ 5°C				
Comp.	Model	ZB114KQE	ZB130KQE	ZB150KQE	ZB190KQE	
	Max. I (A)	38.0	33.1	38.0	48.3	
Capacity / Power (kW)	Evap.	-5°C	28.5 / 13.2	31.1 / 13.6	37.7 / 17.1	47.2 / 21.4
		-8°C	26.2 / 12.7	28.6 / 13.0	34.7 / 16.3	43.5 / 20.4
		-10°C	24.5 / 12.4	26.7 / 12.7	32.6 / 15.9	40.8 / 20.0
		-15°C	20.4 / 11.8	22.3 / 12.0	27.5 / 15.1	34.5 / 19.0
Fan	Voltage (V)		3P / 380V / 50Hz			
	Current (A)		2.2	2.2	3.5	3.5
	Power (W)		548×2	548×2	937×2	937×2
	Rev. (r/min)		1380	1380	1378	1378
Suction Line (mm)		φ35	φ42	φ42	φ42	
Liquid Line (mm)		φ19	φ22	φ22	φ22	
Size	L (mm)	1620	1920	1920	2070	
	W (mm)	1010	1110	1100	1110	
	H (mm)	1695	1915	1915	1915	

Note: Parameter calibration condition, ambient temperature 32°C;



3. TECHNICAL DATA



3.1.2 Low temperature unit R404A / R507A

Model		PUW06JYE	PUW08JYE	PUW10JYE	PUW12JYE	PUW15JYE	PUW18JYE
Power Supply		3P / 380V / 50Hz					
Apply Temp.		-15°C ~ -35°C					
Comp.	Model	ZFI26KQE	ZFI36KQE	ZFI39KQE	ZFI50KQE	ZFI59KQE	ZFI68KQE
	Max. I (A)	13.7	16.0	18.1	25.0	29.0	30.0
Capacity / Power (kW)	Evap.	-20°C	9.7 / 5.5	12.0 / 6.7	13.8 / 8.1	16.5 / 8.9	20.0 / 10.8
		-25°C	8.2 / 5.1	10.4 / 6.2	11.9 / 7.5	14.0 / 8.2	17.0 / 9.9
		-30°C	7.0 / 4.7	8.8 / 5.6	10.1 / 6.8	11.7 / 7.5	14.2 / 9.1
		-35°C	5.9 / 4.3	7.4 / 5.2	8.5 / 6.2	9.9 / 6.9	12.0 / 8.4
		-40°C	5.0 / 4.1	6.1 / 4.7	7.0 / 5.6	8.4 / 6.4	10.3 / 7.8
Fan	Voltage (V)	3P / 380V / 50Hz					
	Current (A)	0.92	0.92	0.92	0.92	1.75	2.2
	Power (W)	220 × 2	220 × 2	220 × 2	220 × 2	937 × 1	548 × 2
	Rev. (r/min)	1362	1362	1362	1362	1378	1380
Suction Line (mm)		Φ19	Φ22	Φ22	Φ35	Φ35	Φ35
Liquid Line (mm)		Φ12	Φ16	Φ16	Φ16	Φ19	Φ19
Size	L (mm)	1470	1470	1470	1620	1620	1620
	W (mm)	825	825	825	1010	1010	1010
	H (mm)	1465	1465	1465	1695	1695	1695

Note: Parameter calibration condition, ambient temperature 32°C;

3.2 Unit with Bitzer semi-hermetic compressor

3.2.1 Medium temperature unit R404A / R507A

Model		PUB05MYB	PUB06MYB	PUB07MYB	PUB09MYB	PUB12MYB
Power Supply		3P / 380V / 50Hz				
Apply Temp.		-5°C ~ 5°C				
Comp.	Model	4FES-5Y	4EES-6Y	4DES-7Y	4CES-9Y	4TES-12Y
	Max. I (A)	10.8	13.6	16.5	20.2	25.2
Capacity / Power (kW)	Evap.	-5°C	10.2 / 4.5	12.9 / 5.8	15.6 / 6.7	18.7 / 8.2
		-8°C	9.1 / 4.2	11.4 / 5.3	13.4 / 6.2	16.7 / 7.8
		-10°C	8.5 / 4.1	10.8 / 5.3	12.9 / 6.2	15.6 / 7.4
		-15°C	7.1 / 3.7	9.0 / 4.7	10.7 / 5.6	12.9 / 6.7
Fan	Voltage (V)	3P / 380V / 50Hz				
	Current (A)	0.92	0.92	0.92	1.75	2.2
	Power (W)	220 × 2	220 × 2	220 × 2	937 × 1	548 × 2
	Rev. (r/min)	1362	1362	1362	1378	1380
Suction Line (mm)		Φ22	Φ28	Φ28	Φ28	Φ35
Liquid Line (mm)		Φ12	Φ12	Φ16	Φ16	Φ16
Size	L (mm)	1470	1470	1020	1020	1620
	W (mm)	825	825	1125	1125	1010
	H (mm)	1465	1465	1695	1695	1695

Note: Parameter calibration condition, ambient temperature 32°C;



3. TECHNICAL DATA



3.2 Unit with Bitzer semi-hermetic compressor

3.2.1 Medium temperature unit R404A / R507A

Model			PUB15MYB	PUB20MYB	PUB25MYB	PUB30MYB
Power Supply			3P / 380V / 50Hz			
Apply Temp.			-5°C ~ 5°C			
Comp.	Model		4PES-15Y	4NES-20Y	4HE-25Y	4GE-30Y
	Max. I (A)		28.2	33.2	44.0	51.2
Capacity / Power (kW)	Evap.	-5°C	27.0 / 11.4	32.2 / 13.8	43.2 / 18.6	49.9 / 22.2
		-8°C	24.2 / 10.6	28.9 / 13.0	39.0 / 17.5	45.2 / 20.8
		-10°C	22.3 / 10.2	26.7 / 12.4	36.2 / 16.7	42.0 / 19.9
		-15°C	18.2 / 9.0	21.9 / 11.0	30.1 / 15.0	35.0 / 17.8
Fan	Voltage (V)		3P / 380V / 50Hz			
	Current (A)		2.2	2.2	3.5	3.5
	Power (W)		548 × 2	548 × 2	937 × 2	937 × 2
	Rev. (r/min)		1380	1380	1378	1378
Suction Line (mm)			φ42	φ42	φ54	φ54
Liquid Line (mm)			φ19	φ22	φ22	φ22
Size	L (mm)		1620	1920	1920	2070
	W (mm)		1010	1110	1110	1110
	H (mm)		1695	1915	1915	1915

Note: Parameter calibration condition, ambient temperature 32°C;

3.2.2 Low temperature unit R404A / R507A

Model		PUB05LYB	PUB06LYB	PUB09LYB	PUB12LYB	PUB14LYB	
Power Supply		3P / 380V / 50Hz					
Apply Temp.		-15°C ~ -35°C					
Comp.	Model	4DES-5Y	4CES-6Y	4TES-9Y	4PES-12Y	4NES-14Y	
	Max. I (A)	14.5	17.7	19.9	22.7	26.6	
Capacity / Power (kW)	Evap.	-20°C	7.3 / 5.2	8.8 / 6.2	10.8 / 7.4	12.0 / 8.1	14.7 / 10.0
		-25°C	5.9 / 4.6	7.0 / 5.4	8.6 / 6.4	9.5 / 6.9	11.7 / 8.6
		-30°C	4.7 / 3.9	5.6 / 4.6	6.7 / 5.4	7.3 / 5.8	9.1 / 7.2
		-35°C	3.6 / 3.3	4.3 / 3.9	5.1 / 4.4	5.5 / 4.7	7.0 / 6.0
		-40°C	2.8 / 2.8	3.2 / 3.2	3.8 / 3.6	4.0 / 3.8	5.2 / 4.9
Fan	Voltage (V)		3P / 380V / 50Hz				
	Current (A)	0.92	0.92	0.92	0.92	0.92	
	Power (W)	220 × 2	220 × 2	220 × 2	220 × 2	220 × 2	
	Rev. (r/min)	1362	1362	1362	1362	1362	
Suction Line (mm)		φ28	φ28	φ35	φ35	φ35	
Liquid Line (mm)		φ12	φ12	φ16	φ16	φ16	
Size	L (mm)	1470	1470	1470	1470	1620	
	W (mm)	825	825	825	825	1010	
	H (mm)	1465	1465	1465	1465	1695	

Note: Parameter calibration condition, ambient temperature 32°C;



3.2.2 Low temperature unit R404A / R507A

Model		PUB18LYB	PUB23LYB	PUB28LYB	PUB34LYB	PUB44LYB	
Power Supply		3P / 380V / 50Hz					
Apply Temp.		-15°C ~ -35°C					
Comp.	Model	4HE-18Y	4GE-23Y	4FE-28Y	6GE-34Y	6FE-44Y	
	Max. I (A)	36.7	43.9	52.8	65.5	83.2	
Capacity / Power (kW)	Evap.	-20°C	20.7/13.8	24.2/16.4	29.0/19.7	36.4/25.0	43.4/30.0
		-25°C	16.7/12.0	19.7/14.3	23.5/17.1	29.7/21.8	35.3/26.2
		-30°C	13.2/10.3	15.7/12.2	18.8/14.7	23.8/18.8	28.2/22.6
		-35°C	10.2/8.7	12.3/10.4	14.7/12.4	18.8/16.0	22.0/19.3
		-40°C	7.7/7.3	9.3/8.7	11.2/10.3	14.4/13.4	16.7/16.2
Voltage (V)		3P / 380V / 50Hz					
Current (A)		2.2	2.2	2.2	3.5	3.5	
Power (W)		548×2	548×2	548×2	937×2	937×2	
Rev. (r/min)		1380	1380	1380	1378	1378	
Suction Line (mm)		φ42	φ54	φ54	φ54	φ54	
Liquid Line (mm)		φ19	φ22	φ22	φ22	φ28	
Size	L (mm)	1620	1620	1920	1920	2070	
	W (mm)	1010	1010	1110	1110	1110	
	H (mm)	1695	1695	1915	1915	1915	

Note: Parameter calibration condition, ambient temperature 32°C;

3.3 Unit with Frascold semi-hermetic compressor

3.3.1 Medium temperature unit R404A / R507A

Model		PUB05MYF	PUB07MYF	PUB12MYF	PUB15MYF	PUB20MYF	PUB25MYF	PUB30MYF	
Power Supply		3P / 380V / 50Hz							
Apply Temp.		-5°C ~ 5°C							
Comp.	Model	Q5-24.1Y	Q7-33.1Y	S12-42Y	S15-52Y	S20-56Y	V25-71Y	V30-84Y	
	Max. I (A)	13.8	20.0	22.4	32.4	38.4	43.5	49.2	
Capacity / Power (kW)	Evap.	-5°C	13.2/5.9	18.4/8.4	22.6/9.7	29.9/12.3	32.8/14.4	42.1/14.5	49.4/17.5
		-8°C	11.9/5.6	16.7/7.9	20.4/9.0	27.1/11.9	29.7/13.6	38.2/13.7	44.8/16.5
		-10°C	11.0/5.4	15.5/7.6	18.9/8.6	25.3/11.6	27.6/13.0	35.6/13.2	41.7/15.9
		-15°C	9.1/4.8	12.9/6.8	15.6/7.7	21.2/10.4	23.0/11.6	29.8/11.9	35.1/14.4
Voltage (V)		3P / 380V / 50Hz							
Current (A)		0.92	1.75	1.75	2.2	2.2	3.5	3.5	
Power (W)		220×2	937×1	937×1	548×2	548×2	937×2	937×2	
Rev. (r/min)		1362	1378	1378	1380	1380	1378	1378	
Suction Line (mm)		φ28	φ35	φ35	φ42	φ42	φ54	φ54	
Liquid Line (mm)		φ12	φ16	φ16	φ19	φ22	φ22	φ22	
Size	L (mm)	1470	1020	1620	1620	1920	1920	2070	
	W (mm)	825	1125	1010	1010	1110	1110	1110	
	H (mm)	1465	1695	1695	1695	1915	1915	1915	

Note: Parameter calibration condition, ambient temperature 32°C;


3. TECHNICAL DATA

3.3.2 Low temperature unit R404A / R507A

Model		PUB05LYF	PUB08LYF	PUB10LYF	PUB15LYF	PUB20LYF	PUB25LYF	PUB30LYF
Power Supply		3P / 380V / 50Hz						
Apply Temp.		-15°C ~ -35°C						
Comp.	Model	Q5 -33.1Y	S8 -42Y	S10 -52Y	V15 -71Y	V20 -84Y	V25 -103Y	Z30 -126Y
	Max. I (A)	14.4	20.3	24.5	32.2	46.2	52.3	55.7
Capacity / Power (kW)	Evap.	-20°C	9.0/6.6	11.7/7.8	14.7/10.1	19.9/14.0	22.5/15.8	28.2/21.0
		-25°C	7.4/5.7	9.5/6.8	12.1/8.7	16.3/12.0	18.4/13.7	22.6/18.1
		-30°C	5.9/4.8	7.5/5.8	9.8/7.4	13.2/10.2	14.7/11.7	17.7/15.4
		-35°C	4.6/4.1	5.8/4.8	7.7/6.3	10.3/8.5	11.4/9.9	13.5/12.9
		-40°C	3.5/3.4	4.2/3.9	5.8/5.2	7.7/7.0	8.5/8.2	9.8/10.8
Fan	Voltage (V)	3P / 380V / 50Hz						
	Current (A)	0.92	0.92	0.92	2.2	2.2	2.2	3.5
	Power (W)	220×2	220×2	220×2	548×2	548×2	548×2	937×2
	Rev. (r/min)	1362	1362	1362	1380	1380	1380	1378
Suction Line (mm)		φ35	φ35	φ35	φ42	φ54	φ54	φ54
Liquid Line (mm)		φ16	φ16	φ16	φ19	φ22	φ22	φ22
Size (mm)	L	1470	1470	1470	1620	1620	1920	1920
	W	825	825	825	1010	1010	1110	1110
	H	1465	1465	1465	1695	1695	1915	1915

Note: Parameter calibration condition, ambient temperature 32°C;

4. DIMENSION DRAWING OF UNITS

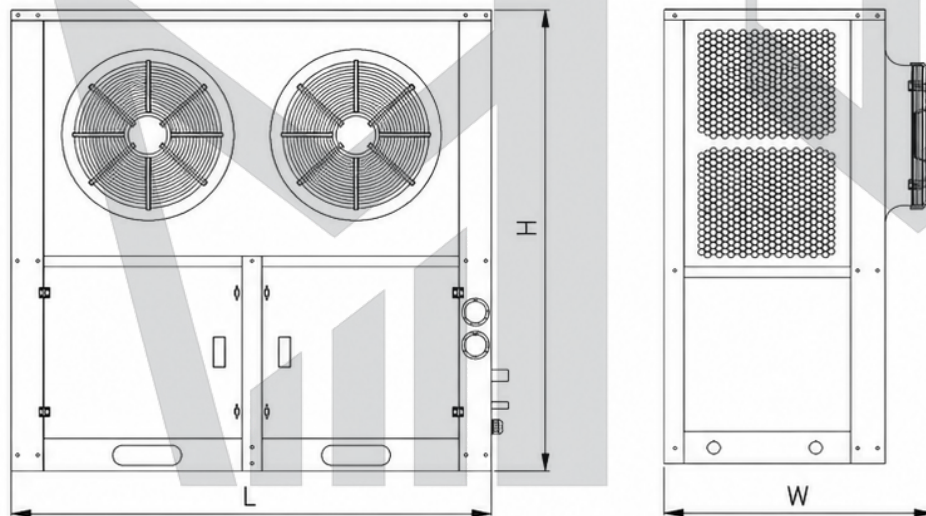



SAUVERAIN



SAUVERAIN

5. STANDARD CONFIGURATION AND OPTIONAL CONFIGURATION

5.1 Units for scroll compressor

1) Medium temp. unit

Parts	PUW Units of PUW model								
	05MYE	06MYE	08MYE	10MYE	13MYE	15MYE	20MYE	22MYE	25MYE
Compressor	●	●	●	●	●	●	●	●	●
Oil Heater	▲	▲	▲	▲	▲	▲	▲	▲	▲
Discharge Vibration Damper	▲	▲	▲	▲	▲	▲	▲	▲	▲
Oil Separator	▲	▲	▲	▲	▲	▲	●	●	●
Condenser	●	●	●	●	●	●	●	●	●
AC Motor	●	●	●	●	●	●	●	●	●
Receiver	●	●	●	●	●	●	●	●	●
Liquid Filter	●	●	●	●	●	●	●	●	●
Sight Glass	●	●	●	●	●	●	●	●	●
Solenoid Valve	▲	▲	▲	▲	▲	▲	▲	▲	▲
HP Switch	▲	▲	▲	▲	▲	▲	▲	▲	▲
LP Switch	●	●	●	●	●	●	●	●	●
HP/LP Gauge	●	●	●	●	●	●	●	●	●
Accumulator	▲	▲	▲	▲	▲	▲	▲	▲	▲
Liquid Line Valve	▲	▲	▲	▲	▲	▲	▲	▲	▲
Suction Line Valve	▲	▲	▲	▲	▲	▲	▲	▲	▲
Electric Control for Unit	▲	▲	▲	▲	▲	▲	▲	▲	▲

● Standard Configuration; ▲ Optional, need extra costs;

2) Low temp. unit

Parts	PUW Units of PUW model					
	With EVI					
	06LYE	08LYE	10LYE	12LYE	15LYE	18LYE
Compressor	●	●	●	●	●	●
Oil Heater	●	●	●	●	●	●
Discharge Vibration Damper	▲	▲	▲	▲	▲	▲
Oil Separator	▲	▲	▲	▲	▲	▲
Condenser	●	●	●	●	●	●
AC Motor	●	●	●	●	●	●
Receiver	●	●	●	●	●	●
Liquid Filter	●	●	●	●	●	●
Sight Glass	●	●	●	●	●	●
Solenoid Valve	▲	▲	▲	▲	▲	▲
HP Switch	●	●	●	●	●	●
LP Switch	●	●	●	●	●	●
HP/LP Gauge	●	●	●	●	●	●
Accumulator	▲	▲	▲	▲	▲	▲
EVI	▲	▲	▲	▲	▲	▲
Liquid Line Valve	▲	▲	▲	▲	▲	▲
Suction Line Valve	▲	▲	▲	▲	▲	▲
Electric Control for Unit	▲	▲	▲	▲	▲	▲

● Standard Configuration; ▲ Optional, need extra costs;



5. STANDARD CONFIGURATION AND OPTIONAL CONFIGURATION

5.2 Units for semi-hermetic compressor

5.2.1 Units for Bitzer compressor

1) Medium temp. unit

Parts	PUB Model of Unit								
	05MYB	06MYB	07MYB	09MYB	12MYB	15MYB	20MYB	25MYB	30MYB
Compressor	●	●	●	●	●	●	●	●	●
Oil Heater	●	●	●	●	●	●	●	●	●
Discharge Vibration Damper	▲	▲	▲	▲	●	●	●	●	●
Oil Separator	▲	▲	▲	▲	●	●	●	●	●
Condenser	●	●	●	●	●	●	●	●	●
AC Motor	●	●	●	●	●	●	●	●	●
Receiver	●	●	●	●	●	●	●	●	●
Liquid Filter	●	●	●	●	●	●	●	●	●
Sight Glass	▲	▲	▲	▲	●	●	●	●	●
Solenoid Valve	▲	▲	▲	▲	●	●	●	●	●
HP/LP Switch	▲	▲	▲	▲	●	●	●	●	●
Oil Pressure Switch	▲	▲	▲	▲	●	●	●	●	●
HP/LP Gauge	▲	▲	▲	▲	▲	▲	▲	▲	▲
Accumulator	▲	▲	▲	▲	●	●	●	●	●
Liquid Line Valve	▲	▲	▲	▲	▲	▲	▲	▲	▲
Electric Control for Unit	▲	▲	▲	▲	▲	▲	▲	▲	▲

● Standard Configuration; ▲ Optional, need extra costs;

2) Low temp. unit

Parts	PUB Model of Unit									
	05LYB	06LYB	09LYB	12LYB	14LYB	18LYB	23LYB	28LYB	34LYB	44LYB
Compressor	●	●	●	●	●	●	●	●	●	●
Oil Heater	●	●	●	●	●	●	●	●	●	●
Discharge Vibration Damper	▲	▲	▲	●	●	●	●	●	●	●
Oil Separator	▲	▲	▲	●	●	●	●	●	●	●
Condenser	●	●	●	●	●	●	●	●	●	●
AC Motor	●	●	●	●	●	●	●	●	●	●
Receiver	●	●	●	●	●	●	●	●	●	●
Liquid Filter	●	●	●	●	●	●	●	●	●	●
Sight Glass	▲	▲	▲	●	●	●	●	●	●	●
Solenoid Valve	▲	▲	▲	●	●	●	●	●	●	●
HP/LP Switch	▲	▲	▲	●	●	●	●	●	●	●
Oil Pressure Switch	▲	▲	▲	●	●	●	●	●	●	●
HP/LP Gauge	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
Accumulator	▲	▲	▲	●	●	●	●	●	●	●
Liquid Line Valve	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
Electric Control for Unit	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲

● Standard Configuration; ▲ Optional, need extra costs;



5. STANDARD CONFIGURATION AND OPTIONAL CONFIGURATION

5.2 Units for Frascold compressor

1) Medium temp. unit

Parts	PUB Model of Unit						
	05MYF	07MYF	12MYF	15MYF	20MYF	20MYF	30MYF
Compressor	●	●	●	●	●	●	●
Oil Heater	●	●	●	●	●	●	●
Discharge Vibration Damper	▲	▲	●	●	●	●	●
Oil Separator	▲	▲	●	●	●	●	●
Condenser	●	●	●	●	●	●	●
AC Motor	●	●	●	●	●	●	●
Receiver	●	●	●	●	●	●	●
Liquid Filter	●	●	●	●	●	●	●
Sight Glass	●	●	●	●	●	●	●
Solenoid Valve	▲	▲	▲	▲	▲	▲	▲
HP/LP Switch	▲	▲	▲	▲	▲	▲	▲
Oil Pressure Switch	▲	▲	▲	▲	▲	▲	▲
HP/LP Gauge	▲	▲	▲	▲	▲	▲	▲
Accumulator	▲	▲	▲	▲	▲	▲	▲
Liquid Line Valve	▲	▲	▲	▲	▲	▲	▲
Electric Control for Unit	▲	▲	▲	▲	▲	▲	▲

● Standard Configuration; ▲ Optional, need extra costs;

2) Low temp. unit

Parts	PUB Model of Unit						
	05LYF	08LYF	10LYF	15LYF	20LYF	25LYF	30LYF
Compressor	●	●	●	●	●	●	●
Oil Heater	●	●	●	●	●	●	●
Discharge Vibration Damper	▲	▲	●	●	●	●	●
Oil Separator	▲	▲	●	●	●	●	●
Condenser	●	●	●	●	●	●	●
AC Motor	●	●	●	●	●	●	●
Receiver	●	●	●	●	●	●	●
Liquid Filter	●	●	●	●	●	●	●
Sight Glass	●	●	●	●	●	●	●
Solenoid Valve	▲	▲	▲	▲	▲	▲	▲
HP/LP Switch	▲	▲	▲	▲	▲	▲	▲
Oil Pressure Switch	▲	▲	▲	▲	▲	▲	▲
HP/LP Gauge	▲	▲	▲	▲	▲	▲	▲
Accumulator	▲	▲	▲	▲	▲	▲	▲
Liquid Line Valve	▲	▲	▲	▲	▲	▲	▲
Electric Control for Unit	▲	▲	▲	▲	▲	▲	▲

● Standard Configuration; ▲ Optional, need extra costs;